

PC-JS50

OUTPUT APPROX 0.01-2.0W
输出功率 约0.01-2.0W

减速电机
Gear-box motors



典型应用 Typical Applications


- Lamp / toy / display stand / Craft gift / fan / actuator
灯饰/玩具/展示架/工艺礼品/风扇/致动器

电机特性示例 Motor characteristic example

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率点 AT MAXIMUM EFFICIENCY				功率 OUTPUT w	起动 STALL		电流 CURRENT A
	使用范围 OPERATING RANGE	额定值 NOMINAL	转速 SPEED r/min	电流 CURRENT A	转速 SPEED r/min	电流 CURRENT A	转矩 TORQUE mN.m	g.cm		转矩 TORQUE mN.m	g.cm	
PC-JS50CF-11590	9.0-13.0	12.0V	10	0.05	7.7	0.17	110.5	11270	0.89	4803.9	49000	0.59
PC-JS50CF-071380	20.0-25.0	24.0V	60	0.02	45.6	0.06	165.2	1684.8	0.79	688.2	7020	0.20

其他参数：根据客户的需求设计 Other parameters: according to customer demand for design

外形尺寸 Appearance Size

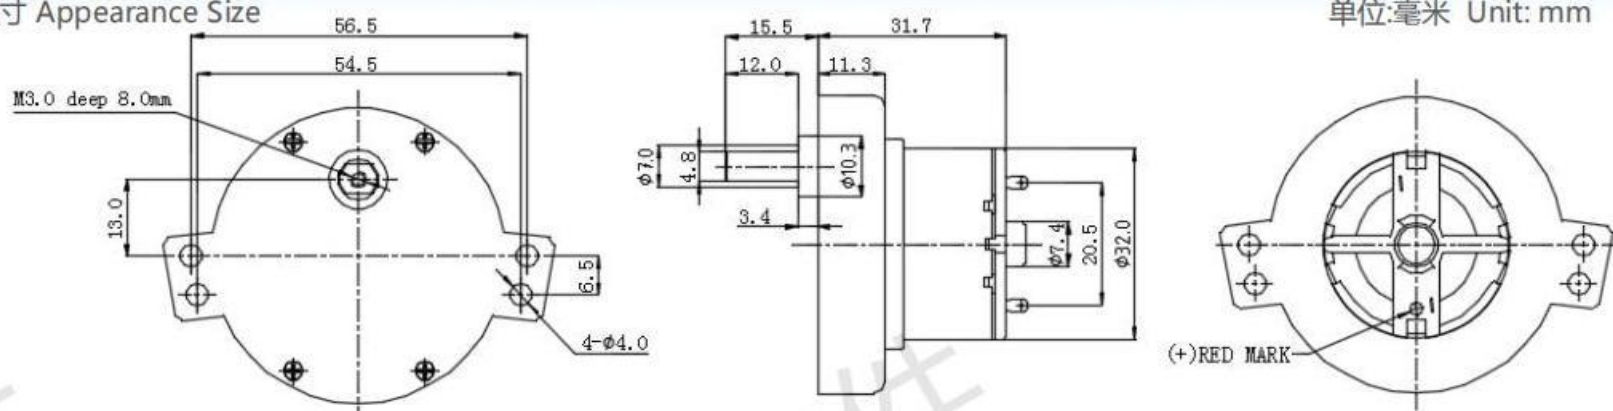

* 备注：塑胶外壳，内置精密齿轮（齿轮可根据负载选择金属和塑胶）*


Note: Plastic housing, built-in precision gear (gear can be selected according to load metal and plastic)

减速比 Reduction Ratio	1:78	1:380	1:490	1:718	/
---------------------	------	-------	-------	-------	---

电机特性(T-N-I曲线) Motor characteristics (T-N-I curve)

PC-JS50CF-11590

DC 12.0V

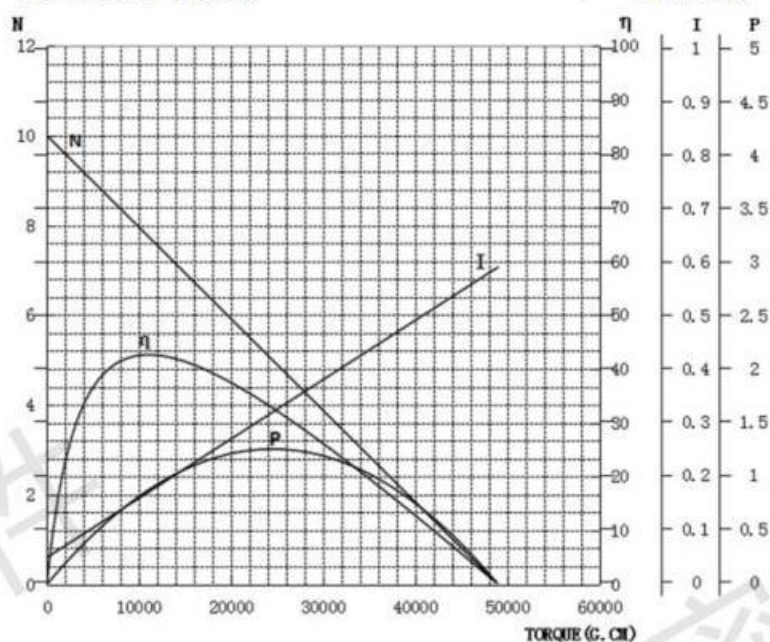

PC-JS50CF-071380

DC 24.0V

