

PYF1-XA (一位一通常开阀)

腕式电磁阀
WRIST VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 10.0g(APPROX)
UNIT: MILLIMETERS

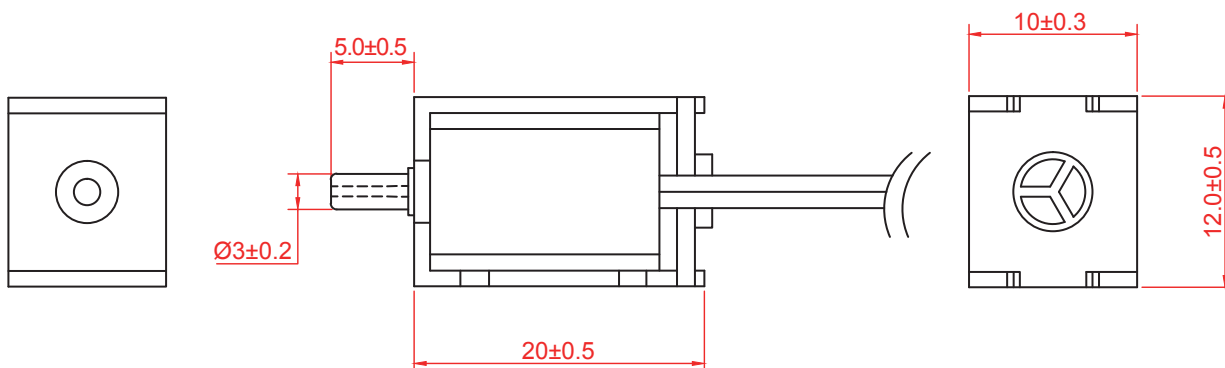

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 12V
额定电流	Rated Current	75 ± 10%mA	67 ± 10%mA	60 ± 10%mA	60 ± 10%mA
直流阻抗	DC Resistance	40 ± 10%Ω	55 ± 10%Ω	100 ± 10%Ω	200 ± 10%Ω
功率	Power	0.22 W	0.25 W	0.36 W	0.72 W
气嘴口径	Air Tap O.D.	Ø3.0mm			
最大压力	Maximum Pressure	40KPa(300mmHg)			
媒介	Medium	Air			
排气速度	Exhaust Speed	< 4sec (from 300 to 15 mmHg in a 100cc tank)			
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)			
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)			
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH			
模式	Type	Normally Opened			
重量	Weight	10g			

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

PYF1-XB (一位一通常开阀)

腕式电磁阀
WRIST VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 17.0g(APPROX)
UNIT: MILLIMETERS

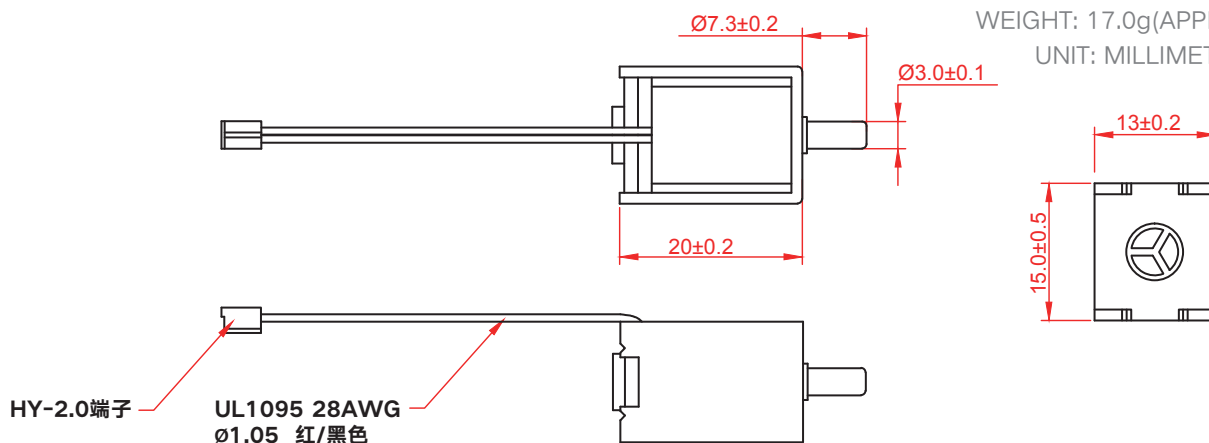

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 9.0V	DC 12.0V
额定电流	Rated Current	66 ± 10%mA	60 ± 10%mA	60 ± 10%mA	40 ± 10%mA	45 ± 10%mA
直流阻抗	DC Resistance	45 ± 10%Ω	60 ± 10%Ω	100 ± 10%Ω	225 ± 10%Ω	270 ± 10%Ω
功率	Power	0.20 W	0.22 W	0.36 W	0.36 W	0.54 W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4sec (from 300 to 15 mmHg in a 500cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 500cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	17g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF1-XC (一位一通常开阀)

腕式电磁阀
WRIST VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, adult products, massagers, cupping devices, pressurization techniques.
血压计、成人用品、按摩器、拔罐器、增压技术.

外形尺寸

Dimension

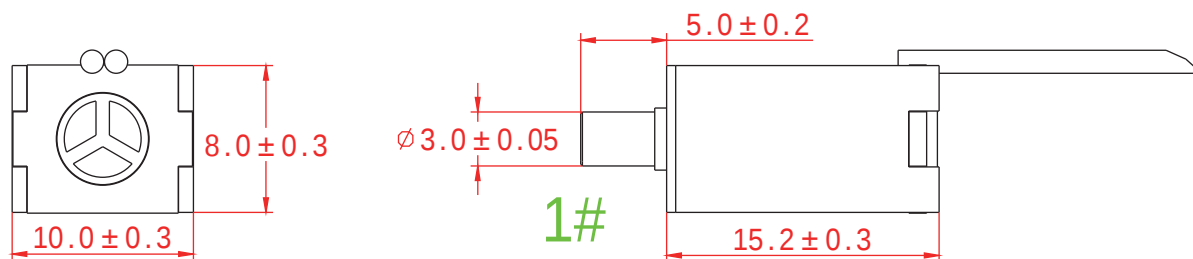

产品规格

Product Specifications

额定电压 Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V	DC 9V
额定电流 Rated Current	200 ± 10% mA	105 ± 10% mA	100 ± 10% mA	120 ± 10% mA	128 ± 10% mA
直流阻抗 DC Resistance	15 ± 10% Ω	35 ± 10% Ω	45 ± 10% Ω	50 ± 10% Ω	70 ± 10% Ω
功率 Power	0.6W	0.39W	0.45W	0.72W	1.61W
气嘴口径 Air Tap O.D.	Ø3.0mm				
最大压力 Maximum Pressure	40KPA(300mmHg)				
媒介 Medium	Air				
排气速度 Exhaust Speed	≤ 4S(from 300 to 15 mmHg in a 100cc tank)				
寿命测试 Life Test	≥ 20万次 times (ON1秒, OFF 1秒)				
气密性 Leak age	< 6mmHg/min(under 300mmHg in a 100cc tank)				
使用温度 Operation Temperature	0-50℃ 30% to 85%				
模式 Type	不通电: 1#打开; 通电: 1#闭合.				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

79

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

H

PYF1-XD (一位一通常开阀)

腕式电磁阀
WRIST VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products. Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 10.0g(APPROX)
UNIT: MILLIMETERS

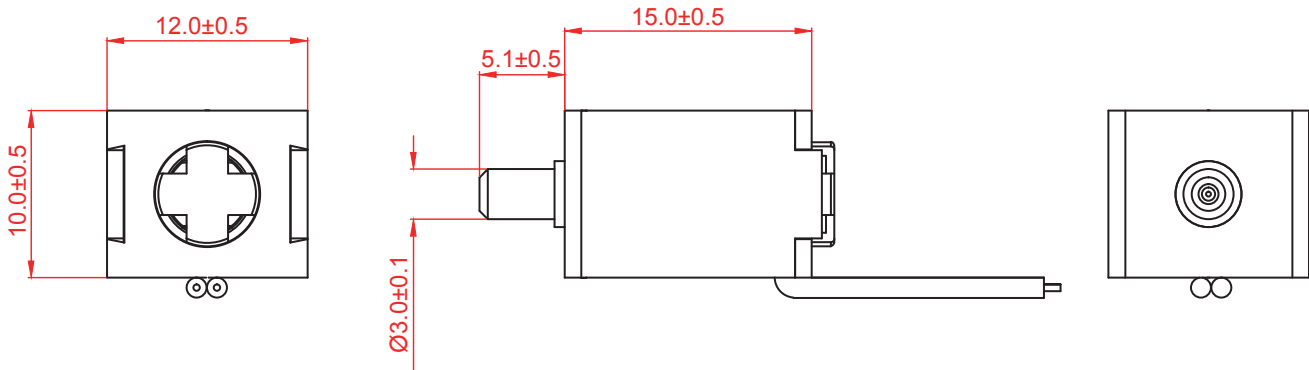

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V
额定电流	Rated Current	100 ± 10%mA	82 ± 10%mA	75 ± 10%mA
直流阻抗	DC Resistance	30 ± 10%Ω	45 ± 10%Ω	80 ± 10%Ω
功率	Power	0.30 W	0.30 W	0.45 W
气嘴口径	Air Tap O.D.	Ø3.0mm		
最大压力	Maximum Pressure	40KPa(300mmHg)		
媒介	Medium	Air		
排气速度	Exhaust Speed	< 4sec (from 300 to 15 mmHg in a 100cc tank)		
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)		
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)		
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH		
模式	Type	Normally Opened		
重量	Weight	10g		

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

PYF2-XZ (一位一通真空阀)

真空电磁阀
VACUUM VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Breast pump, Adult products, Massagers, Essential oil machines, Booster technology
吸奶器、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 17.0g (APPROX)
UNIT: MILLIMETERS

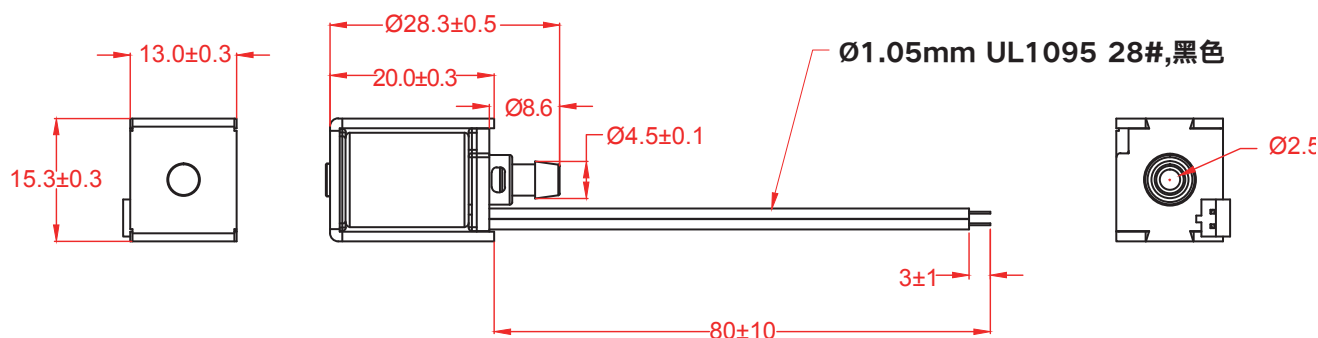

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6.0V	DC 12.0V
额定电流	Rated Current	600 ± 10%mA	528 ± 10%mA	409 ± 10%mA	375 ± 10%mA	240 ± 10%mA
直流阻抗	DC Resistance	5 ± 10%Ω	7 ± 10%Ω	11 ± 10%Ω	16 ± 10%Ω	50 ± 10%Ω
功率	Power	1.8 W	1.95 W	1.84 W	2.25 W	2.88 W
气嘴口径	Air Tap O.D.	Ø4.5mm				
最大压力	Maximum Pressure	- 60KPa (- 450mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 1.0sec (from - 60KPa to 0KPa in a 100cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	< - 1KPa/sec (under - 60KPa in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Closed				
重量	Weight	17g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

81

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

H

PYF2-XA (二位二通常闭阀)

二通电磁阀
TWO-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 10.0g(APPROX)
UNIT: MILLIMETERS

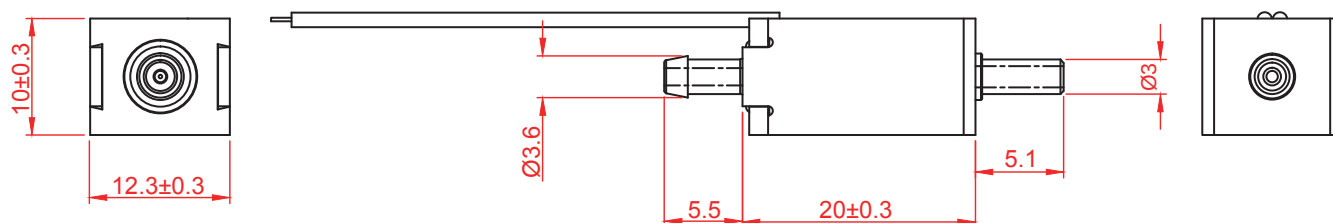

产品规格

Product Specifications

额定电压 Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 9.0V	DC 12.0V
额定电流 Rated Current	375 ± 10%mA	370 ± 10%mA	240 ± 10%mA	225 ± 10%mA	200 ± 10%mA
直流阻抗 DC Resistance	8 ± 10%Ω	10 ± 10%Ω	25 ± 10%Ω	40 ± 10%Ω	60 ± 10%Ω
功率 Power	1.12 W	1.37 W	1.44 W	2.02 W	2.4 W
气嘴口径 Air Tap O.D.	Ø3.0mm				
最大压力 Maximum Pressure	40KPa(300mmHg)				
媒介 Medium	Air				
排气速度 Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试 Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性 Leakage	<3mmHg/min under 300 mmHg in a 100cc tank				
使用温度 Operation Temperature	0 ~50°C 30% to 85%RH				
模式 Type	Normally Opened				
重量 Weight	10g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF2-XB (二位二通常闭阀)

二通电磁阀
TWO-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 16.5g(APPROX)
UNIT: MILLIMETERS

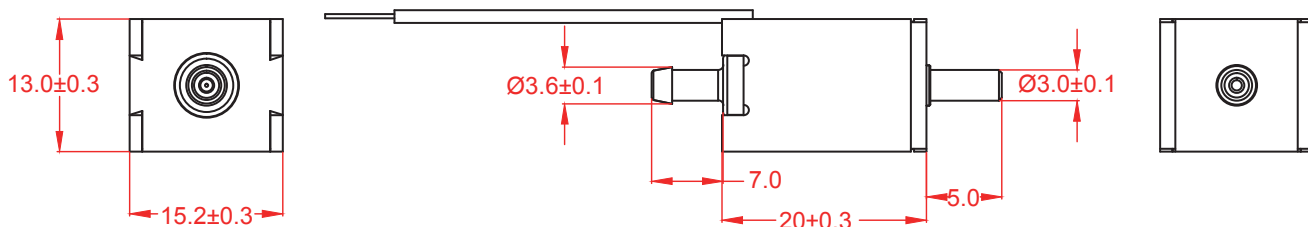

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 9.0V	DC 12.0V
额定电流	Rated Current	375 ± 10%mA	370 ± 10%mA	240 ± 10%mA	225 ± 10%mA	200 ± 10%mA
直流阻抗	DC Resistance	8 ± 10%Ω	10 ± 10%Ω	25 ± 10%Ω	40 ± 10%Ω	60 ± 10%Ω
功率	Power	1.12 W	1.37 W	1.44 W	2.02 W	2.4 W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 500cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 500cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Closed				
重量	Weight	16.5g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF2-XB (二位二通常闭阀)

二通电磁阀
TWO-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 16.5g(APPROX)
UNIT: MILLIMETERS

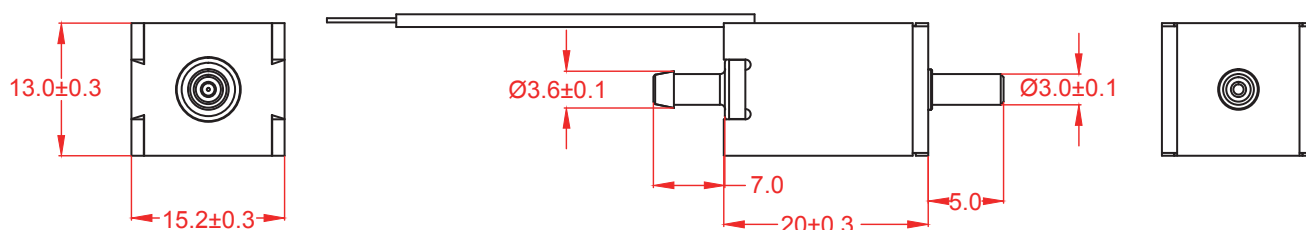

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 9.0V	DC 12.0V
额定电流	Rated Current	375 ± 10%mA	370 ± 10%mA	240 ± 10%mA	225 ± 10%mA	200 ± 10%mA
直流阻抗	DC Resistance	8 ± 10%Ω	10 ± 10%Ω	25 ± 10%Ω	40 ± 10%Ω	60 ± 10%Ω
功率	Power	1.12 W	1.37 W	1.44 W	2.02 W	2.4 W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 500cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 500cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Closed				
重量	Weight	16.5g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF2-XZA (一位一通真空阀)

真空电磁阀
WRIST VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Breast pump, adult products, vacuum packaging machine, pressurization technology
吸奶器、成人用品、真空包装机、增压技术。

外形尺寸

Dimension

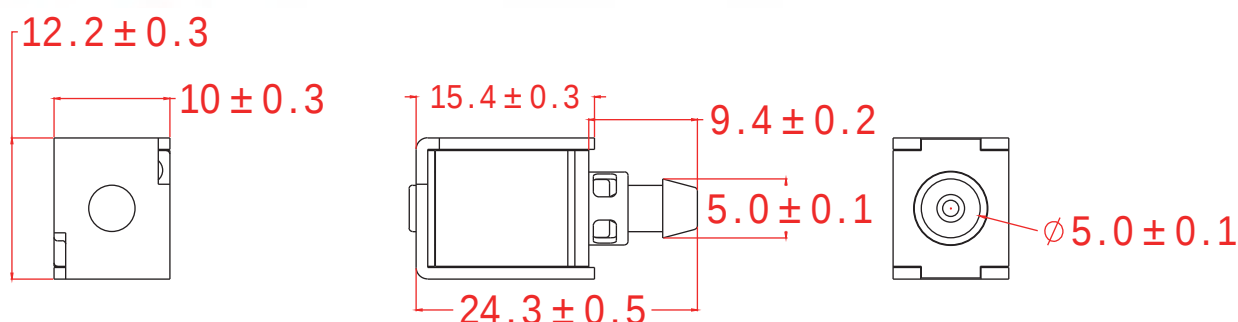

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V	DC 9V
额定电流	Rated Current	428±10%mA	370±10%mA	375±10%mA	400±10%mA	360±10%mA
直流阻抗	DC Resistance	7±10%Ω	10±10%Ω	12±10%Ω	15±10%Ω	25±10%Ω
功率	Power	1.28W	1.36W	1.68W	2.4W	3.24W
气嘴口径	Air Tap O.D.	Ø5.0mm				
最大压力	Maximum Pressure	(-60Kpa)				
媒介	Medium	Air				
排气速度	Exhaust Speed	≤1.0S(from -60Kpa to -2Kpa in a 100cc tank)				
寿命测试	Life Test	≥20万次 times (ON1秒, OFF 1秒)				
气密性	Leak age	< 6mmHg/min(under -450mmHg in a100cc tank)				
使用温度	Operation Temperature	0-50℃ 30% to 85%				
模式	Type	不通电：胶嘴与排气孔不通;通电：胶嘴与排气孔相通。				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

85

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

H




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 15g(APPROX)
UNIT: MILLIMETERS

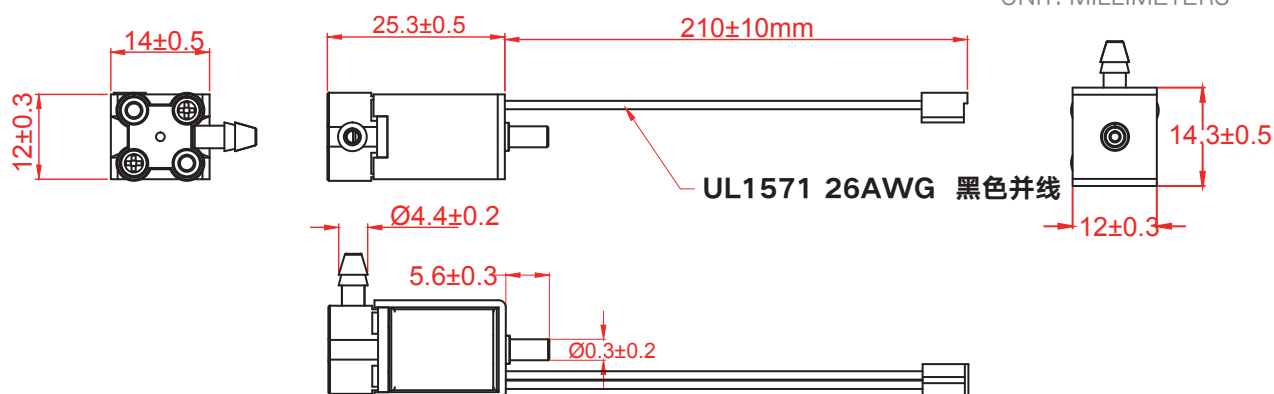

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 12.0V	DC 24.0V
额定电流	Rated Current	120 ± 10%mA	105 ± 10%mA	100 ± 10%mA	100 ± 10%mA	120 ± 10%mA
直流阻抗	DC Resistance	25 ± 10%Ω	35 ± 10%Ω	60 ± 10%Ω	120 ± 10%Ω	200 ± 10%Ω
功率	Power	0.36 W	0.39 W	0.6 W	1.2 W	2.88 W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	15g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 15.0g(APPROX)
UNIT: MILLIMETERS

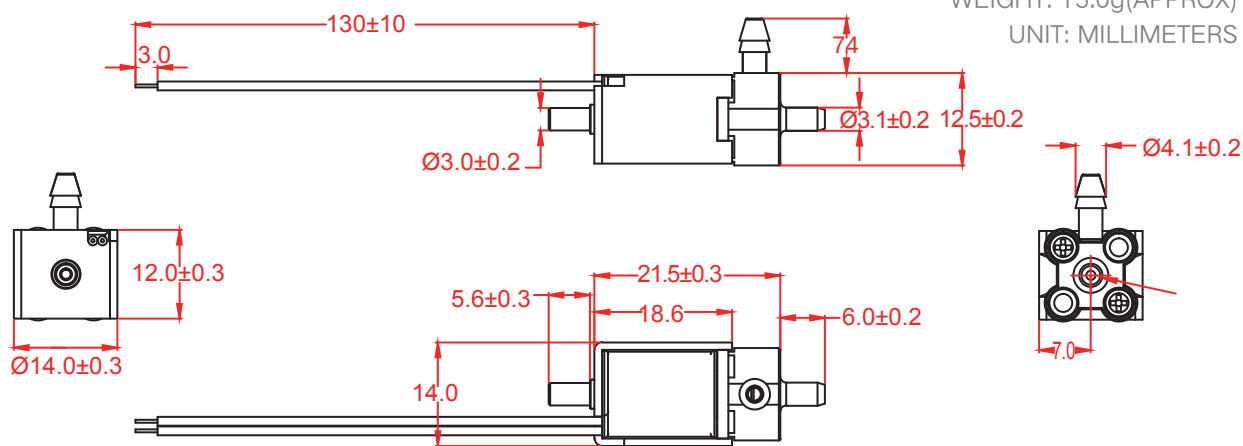

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 12.0V	DC 24.0V
额定电流	Rated Current	120 ± 10%mA	105 ± 10%mA	100 ± 10%mA	100 ± 10%mA	120 ± 10%mA
直流阻抗	DC Resistance	25 ± 10%Ω	35 ± 10%Ω	60 ± 10%Ω	120 ± 10%Ω	200 ± 10%Ω
功率	Power	0.36 W	0.39 W	0.6 W	1.2 W	2.88 W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	15g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 15.0g(APPROX)
UNIT: MILLIMETERS

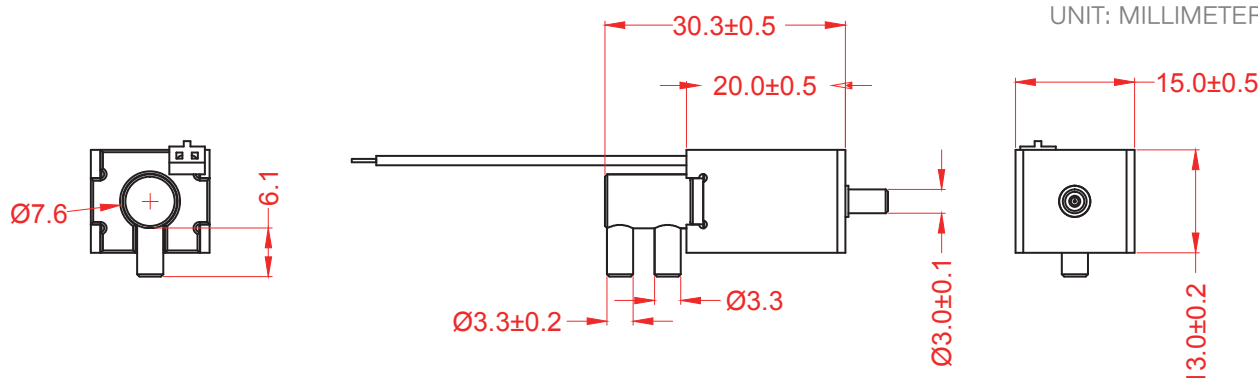

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 12.0V	DC 24.0V
额定电流	Rated Current	$120 \pm 10\% \text{mA}$	$105 \pm 10\% \text{mA}$	$100 \pm 10\% \text{mA}$	$100 \pm 10\% \text{mA}$	$120 \pm 10\% \text{mA}$
直流阻抗	DC Resistance	$25 \pm 10\% \Omega$	$35 \pm 10\% \Omega$	$60 \pm 10\% \Omega$	$120 \pm 10\% \Omega$	$200 \pm 10\% \Omega$
功率	Power	0.36 W	0.39 W	0.6 W	1.2 W	2.88 W
气嘴口径	Air Tap O.D.	$\varnothing 3.3 \text{mm}$				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	$\geq 200,000$ Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	15g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF3-XA (L款两位三通阀)

三通电磁阀
Three-way valve




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器.医疗.美容.按摩.成人用品
- A massager, aromatherapy, adult, healing device.
按摩器、香薰机、成人用品、康复器械。

外形尺寸

Dimension

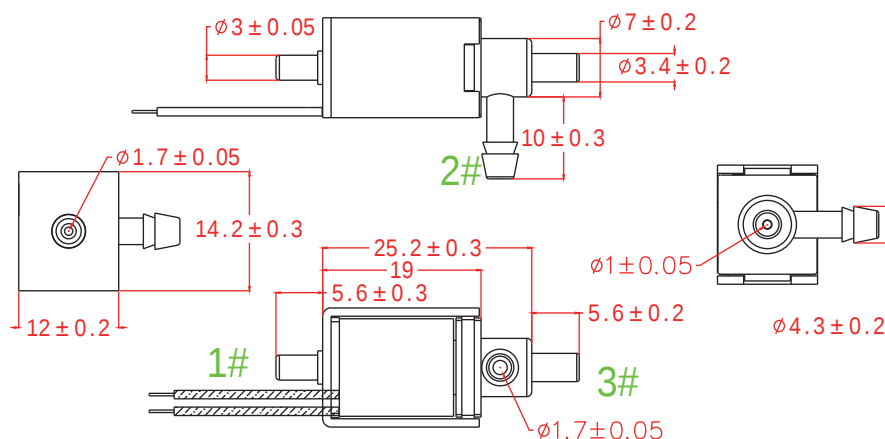

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V	DC 12.0V
额定电流	Rated Current	300 $\pm$ 10%mA	247 $\pm$ 10%mA	225 $\pm$ 10%mA	200 $\pm$ 10%mA	150 $\pm$ 10%mA
直流阻抗	DC Resistance	10 $\pm$ 10% Ω	15 $\pm$ 10% Ω	20 $\pm$ 10% Ω	30 $\pm$ 10% Ω	80 $\pm$ 10% Ω
功率	Power	0.9 W	0.91 W	1.0 W	1.2 W	1.8 W
气嘴口径	Air Tap O.D.	$\phi 3.0\text{mm}$				
最大压力	Maximum Pressure	40KPA(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	$\leq 4\text{S}$ (from 300to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	≥ 20 万次 times (ON1秒, OFF 1秒)				
气密性	Leak age	$< 6\text{mmHg/min}$ (under 300mmHg in a100cc tank)				
使用温度	Operation Temperature	0-50 $^{\circ}\text{C}$ 30% to 85%				
模式	Type	不通电：1#2#相通, 3#闭合; 通电：2# 3#相通, 1闭合。				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

89

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

H




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Sphygmomanometers. Adult products. Massagers. Essential oil machines, Booster technology
血压计.成人用品.按摩器.精油机.增压技术

外形尺寸

Dimension

WEIGHT: 15.0(APPROX)
UNIT:MILLIMETERS

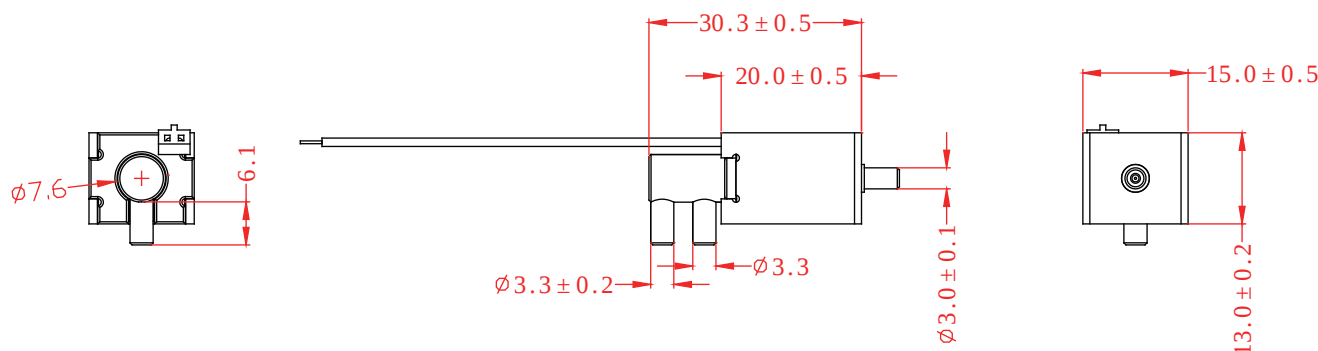

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 12.0V	DC 24.0V
额定电流	Rated Current	120 $\pm$ 10%mA	105 $\pm$ 10%mA	100 $\pm$ 10%mA	100 $\pm$ 10%mA	120 $\pm$ 10%mA
直流阻抗	DC Resistance	25 $\pm$ 10% Ω	35 $\pm$ 10% Ω	60 $\pm$ 10% Ω	120 $\pm$ 10% Ω	200 $\pm$ 10% Ω
功率	Power	0.36 W	0.39 W	0.6 W	1.2 W	2.88 W
气嘴口径	Air Tap O.D.	$\phi 3.3$ mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	$\geq$ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leak age	<3mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	15g				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

PYF3-XEA (眼部按摩三通阀)

三通电磁阀
THREE-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Eye Massager, Adult products, Massagers, Booster technology
眼部按摩器、成人用品、按摩器、增压技术

外形尺寸

Dimension

WEIGHT: 9.0g(APPROX)
UNIT: MILLIMETERS

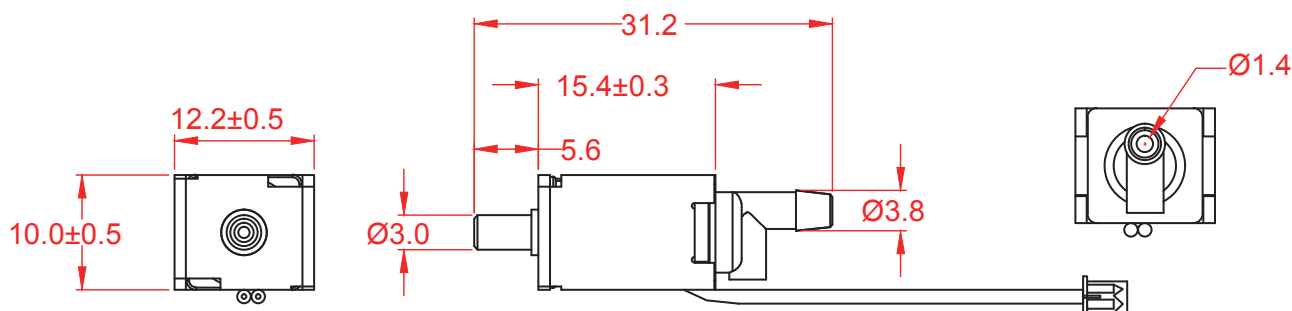

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 9.0V	DC 12.0V
额定电流	Rated Current	375 ± 10%mA	308 ± 10%mA	240 ± 10%mA	225 ± 10%mA	200 ± 10%mA
直流阻抗	DC Resistance	8 ± 10%Ω	12 ± 10%Ω	25 ± 10%Ω	40 ± 10%Ω	60 ± 10%Ω
功率	Power	1.12 W	1.37 W	1.44 W	2.02 W	2.4 W
气嘴口径	Air Tap O.D.	Ø3.8mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	9g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

PYF3-XEB (眼部按摩三通阀)

三通电磁阀

THREE-WAY VALVE



典型应用 Typical Applications


- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Eye Massager, Adult products, Massagers, Booster technology
眼部按摩器、成人用品、按摩器、增压技术

外形尺寸

Dimension

WEIGHT: 9.0g (APPROX)

UNIT: MILLIMETERS

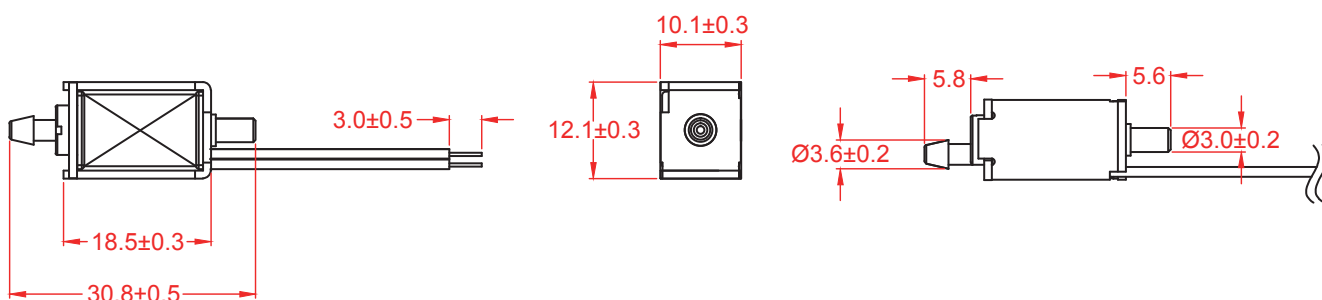

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 6V	DC 9.0V	DC 12.0V
额定电流	Rated Current	375 ± 10% mA	308 ± 10% mA	240 ± 10% mA	225 ± 10% mA	200 ± 10% mA
直流阻抗	DC Resistance	8 ± 10% Ω	12 ± 10% Ω	25 ± 10% Ω	40 ± 10% Ω	60 ± 10% Ω
功率	Power	1.12 W	1.37 W	1.44 W	2.02 W	2.4 W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPa(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Opened				
重量	Weight	9g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。



典型应用 Typical Applications

► Home appliances, medical, beauty, massage, adult products


家用电器、医疗、美容、按摩、成人用品

► An Eye Massager, an adult article, a massager, a supercharger.

眼部按摩器、成人用品、按摩器、增压技术。

外形尺寸

Dimension

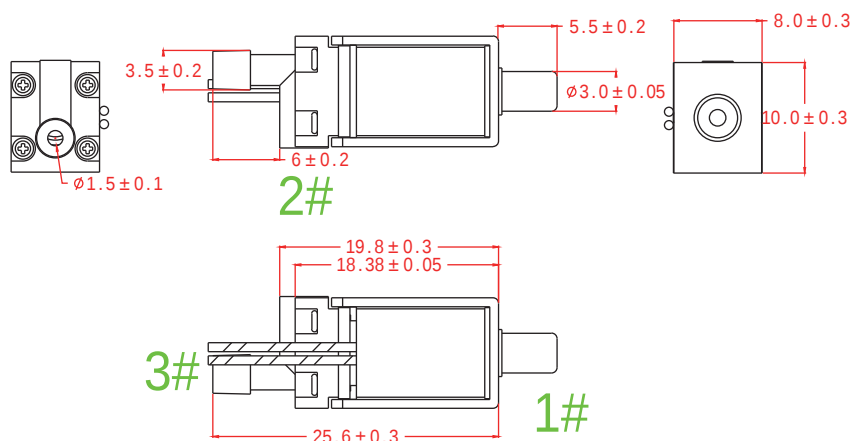

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V	DC 9V
额定电流	Rated Current	300 ± 10% mA	285 ± 10% mA	265 ± 10% mA	240 ± 10% mA	200 ± 10% mA
直流阻抗	DC Resistance	10 ± 10% Ω	13 ± 10% Ω	17 ± 10% Ω	25 ± 10% Ω	45 ± 10% Ω
功率	Power	0.9W	1.05W	1.19W	1.44W	1.8W
气嘴口径	Air Tap O.D.	Ø3.0mm				
最大压力	Maximum Pressure	40KPA(300mmHg)				
媒介	Medium	Air				
排气速度	Exhaust Speed	≤ 4S(from 300 to 15 mmHg in a 100cc tank)				
寿命测试	Life Test	≥ 20万次 times (ON1秒, OFF 1秒)				
气密性	Leak age	< 6mmHg/min(under 300mmHg in a 100cc tank)				
使用温度	Operation Temperature	0-50℃ 30% to 85%				
模式	Type	不通电：1# 3#打开, 2#闭合；通电：2# 3#相通, 1#闭合。				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

PYF3-XN (制氧机三通阀)

三通电磁阀

THREE-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Oxygenator, Cosmetic instrument, Massagers, Booster technology
制氧机、美容仪、按摩器、增压技术

外形尺寸

Dimension

WEIGHT: 42.0g (APPROX)
UNIT: MILLIMETERS

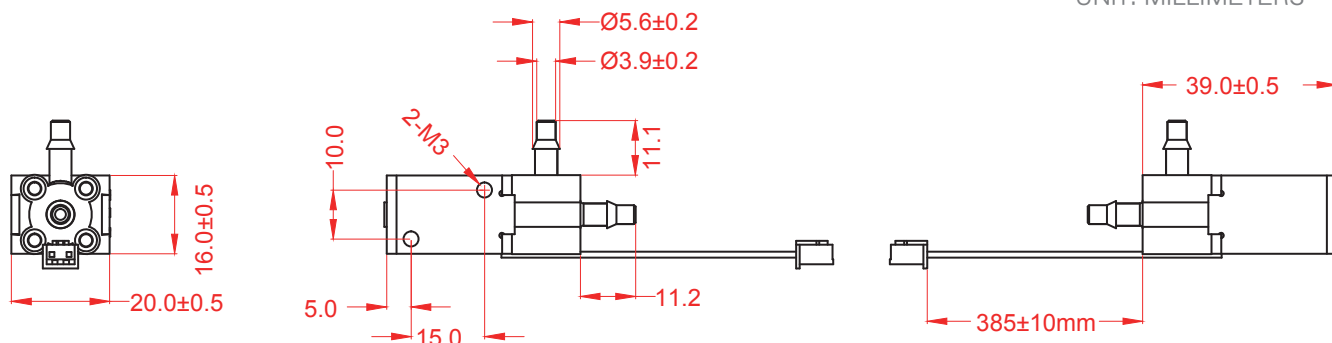

产品规格

Product Specifications

额定电压	Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	200 ± 10% mA	120 ± 10% mA	120 ± 10% mA
直流阻抗	DC Resistance	30 ± 10% Ω	100 ± 10% Ω	200 ± 10% Ω
功率	Power	1.2 W	1.44 W	2.88 W
气嘴口径	Air Tap O.D.	Ø5.6mm		
最大压力	Maximum Pressure	40KPa(300mmHg)		
媒介	Medium	Air		
排气速度	Exhaust Speed	< 4s (from 300 to 15 mmHg in a 500cc tank)		
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)		
气密性	Leakage	<3mmHg/min under 300 mmHg in a 500cc tank		
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH		
模式	Type	Normally Opened		
重量	Weight	42g		

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF3-XL (脚部按摩三通阀)

三通电磁阀
THREE-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Massagers, Beauty Instruments, Booster technology
按摩器、美容仪器、增压技术

外形尺寸

Dimension

WEIGHT: 48.0g(APPROX)
UNIT: MILLIMETERS

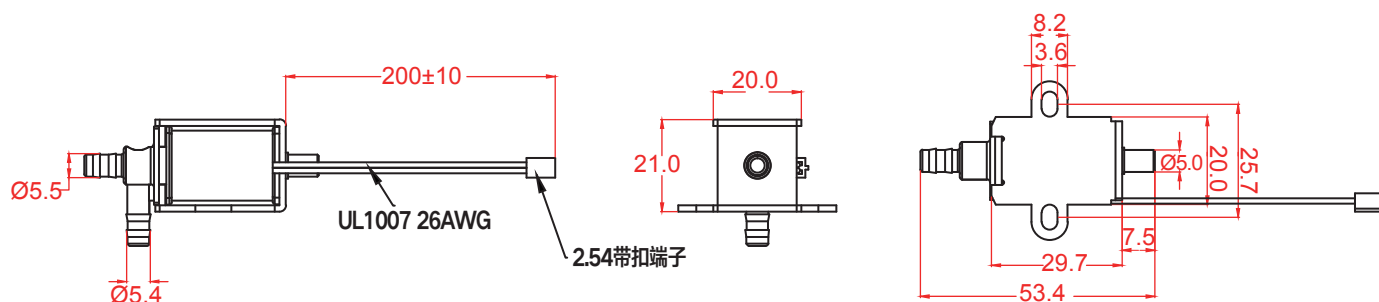

产品规格

Product Specifications

额定电压	Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	300 ± 10%mA	200 ± 10%mA	140 ± 10%mA
直流阻抗	DC Resistance	20 ± 10%Ω	60 ± 10%Ω	170 ± 10%Ω
功率	Power	1.8 W	2.4 W	3.36 W
气嘴口径	Air Tap O.D.	Ø5.5mm		
最大压力	Maximum Pressure	40KPa(300mmHg)		
媒介	Medium	Air		
排气速度	Exhaust Speed	< 2s (from 300 to 15 mmHg in a 500cc tank)		
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)		
气密性	Leakage	<3mmHg/min (under 300 mmHg in a 500cc tank)		
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH		
模式	Type	Normally Opened		
重量	Weight	48g		

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Beauty instruments, Water dispenser, small household appliances
美容仪器、饮水机、小家电

外形尺寸

Dimension

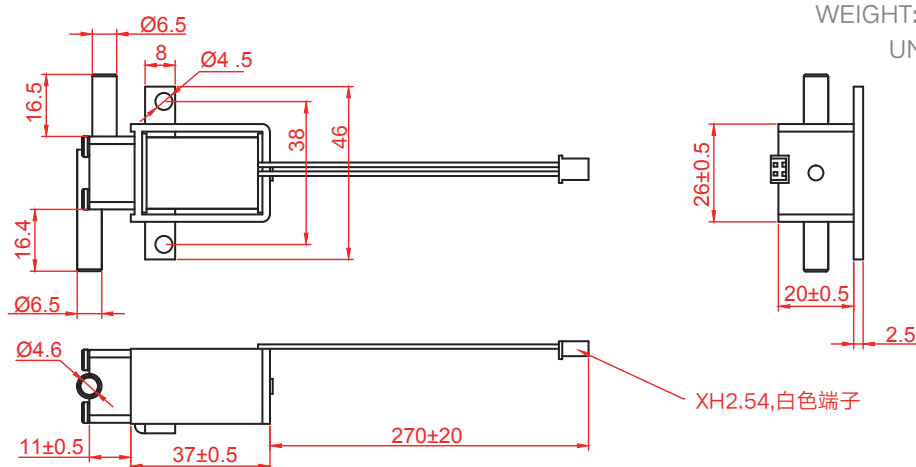

产品规格

Product Specifications

额定电压	Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	300 ± 10%mA	240 ± 10%mA	240 ± 10%mA
直流阻抗	DC Resistance	20 ± 10%Ω	50 ± 10%Ω	100 ± 10%Ω
功率	Power	1.8 W	2.88 W	5.76 W
气嘴口径	Air Tap O.D.	Ø6.5mm		
最大压力	Maximum Pressure	100KPa(14.5Psi)		
媒介	Medium	Water		
排气速度	Exhaust Speed	1.0L/Min		
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)		
气密性	Leakage	<10 mmHg/min (under 300 mmHg in a 100cc tank)		
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH		
模式	Type	Normally Closed		
重量	Weight	100g		

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF3-XG (三通水阀)

三通水阀

THREE-WAY VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Beauty instruments, Water dispenser, small household appliances
美容仪器、饮水机、小家电

外形尺寸

Dimension

WEIGHT: 110.0g(APPROX)
UNIT: MILLIMETERS

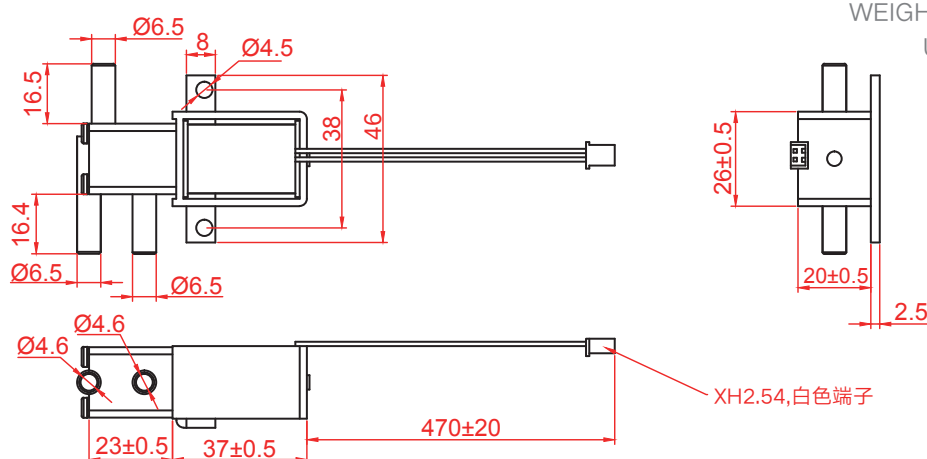

产品规格

Product Specifications

额定电压	Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	300 ± 10%mA	240 ± 10%mA	240 ± 10%mA
直流阻抗	DC Resistance	20 ± 10%Ω	50 ± 10%Ω	100 ± 10%Ω
功率	Power	1.8 W	2.88 W	5.76 W
气嘴口径	Air Tap O.D.	Ø6.5mm		
最大压力	Maximum Pressure	100KPa(14.5Psi)		
媒介	Medium	Water		
排气速度	Exhaust Speed	1.0L/Min		
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)		
气密性	Leakage	<10 mmHg/min under 300 mmHg in a 100cc tank		
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH		
模式	Type	Normally Closed		
重量	Weight	110g		

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYF3-XM (二通小水阀)

二通电磁阀
WATER VALVE




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- Beauty instruments, adult products, small household appliances
美容仪器、成人用品、小家电

外形尺寸

Dimension

WEIGHT: 32.0g (APPROX)
UNIT: MILLIMETERS

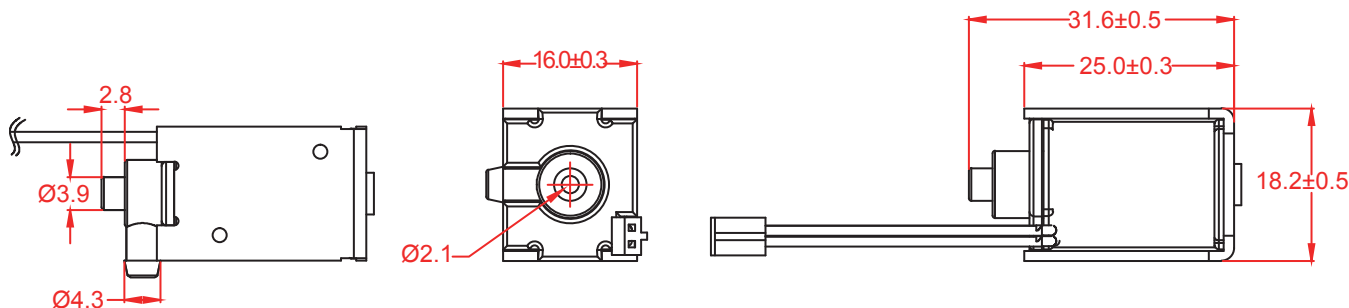

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 5V	DC 6V	DC 12.0V
额定电流	Rated Current	500 ± 10% mA	410 ± 10% mA	330 ± 10% mA	300 ± 10% mA	200 ± 10% mA
直流阻抗	DC Resistance	6 ± 10% Ω	9 ± 10% Ω	15 ± 10% Ω	20 ± 10% Ω	60 ± 10% Ω
功率	Power	1.5 W	1.52 W	1.65 W	1.8 W	2.4 W
气嘴口径	Air Tap O.D.	Ø3.9mm				
最大压力	Maximum Pressure	100KPa (14.5Psi)				
媒介	Medium	Water				
排气速度	Exhaust Speed	200mL/Min				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<10 mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~ 50°C 30% to 85%RH				
模式	Type	Normally Closed				
重量	Weight	32g				

* Other parameters: according to customer demand for design/其他参数: 根据客户的需求设计。

PYF3-5LXB

(小型并联阀 (5联))

小型并联电磁阀

Small parallel solenoid valve




典型应用 Typical Applications

- Household appliances, medical, massage.
家用电器.医疗.按摩.
- massager, Rehabilitation Devices.
按摩器、康复器械.

外形尺寸

Dimension

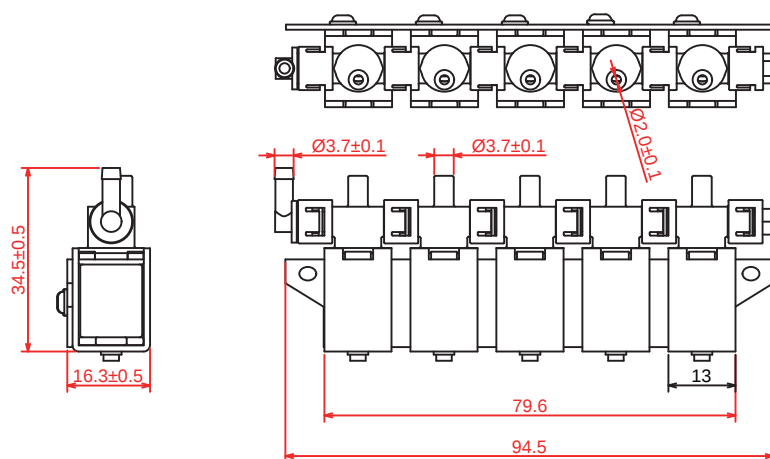

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3.7V	DC 5V	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	247±10%mA	178±10%mA	200±10%mA	104±10%mA	92±10%mA
直流阻抗	DC Resistance	15±10%Ω	28±10%Ω	30±10%Ω	115±10%Ω	260±10%Ω
功率	Power	0.92W	0.89W	1.2W	1.25W	2.2W
气嘴口径	Air Tap O.D.	Ø3.7mm				
最大压力	Maximum Pressure	350mmHg				
媒介	Medium	空气				
排气速度	Exhaust Speed	<6.0s (from 300mmHg to 15mmHg @500cc tank)				
寿命测试	Life Test	≥15万次 times (ON2秒, OFF3秒)				
气密性	Leak age	<15mmHg/min (under 300mmHg in a500cc tank)				
使用温度	Operation Temperature	0-50℃ 65%RH				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

99

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811


H

PYF3-4LZB

(中型并联阀4联)

中型并联阀

Medium-sized parallel valve

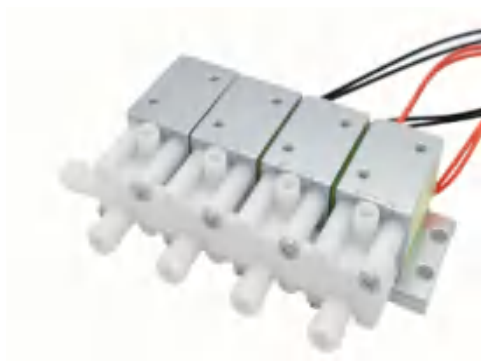


典型应用 Typical Applications

- Household appliances. Medical care. Massage.
家用电器.医疗.按摩.
- Massagers, rehabilitation equipment.
按摩器、康复器械.

外形尺寸

Dimension

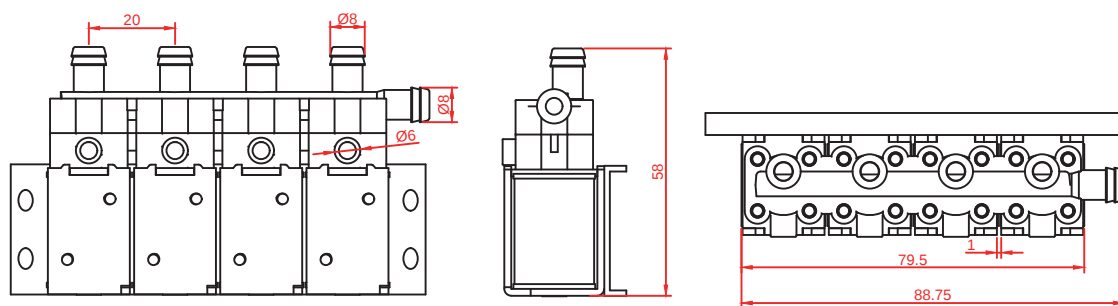

产品规格

Product Specifications

额定电压	Rated Voltage	DC 12V	DC 24V
额定电流	Rated Current	184±10%mA	100±10%mA
直流阻抗	DC Resistance	65±10%Ω	240±10%Ω
功率	Power	2.21W	2.4W
气嘴口径	Air Tap O.D.	Ø8.0mm	
最大压力	Maximum Pressure	46KPa(350mmHg)	
媒介	Medium	Air	
排气速度	Exhaust Speed	≤4S(from 350to 15 mmHg in a 1500cc tank)	
寿命测试	Life Test	≥18万次 times (ON5秒, OFF 5秒)	
气密性	Leak age	< 15mmHg/min	
使用温度	Operation Temperature	5-45°C 30% to 85%	

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,