


PYF1-XA (一位一通常开阀)

腕式电磁阀
WRIST VALVE

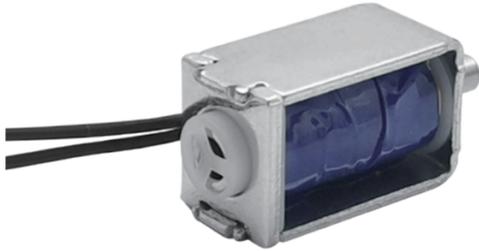


典型应用 Typical Applications

- ▶ Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- ▶ Sphygmomanometers, Adult products, Massagers, Essential oil machines, Booster technology
血压计、成人用品、按摩器、精油机、增压技术

外形尺寸

Dimension

WEIGHT: 10.0g (APPROX)
UNIT: MILLIMETERS

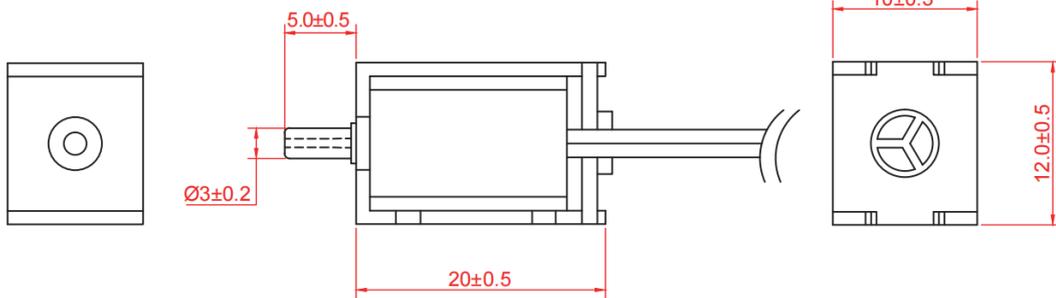

产品规格

Product Specifications

| | | | | | |
|------|-----------------------|--|------------|------------|------------|
| 额定电压 | Rated Voltage | DC 3V | DC 3.7V | DC 6V | DC 12V |
| 额定电流 | Rated Current | 75 ± 10%mA | 67 ± 10%mA | 60 ± 10%mA | 60 ± 10%mA |
| 直流阻抗 | DC Resistance | 40 ± 10%Ω | 55 ± 10%Ω | 100 ± 10%Ω | 200 ± 10%Ω |
| 功率 | Power | 0.22 W | 0.25 W | 0.36 W | 0.72 W |
| 气嘴口径 | Air Tap O.D. | Ø3.0mm | | | |
| 最大压力 | Maximum Pressure | 40KPa(300mmHg) | | | |
| 媒介 | Medium | Air | | | |
| 排气速度 | Exhaust Speed | < 4sec (from 300 to 15 mmHg in a 100cc tank) | | | |
| 寿命测试 | Life Test | ≥ 200,000 Times (ON 5秒, OFF 5秒) | | | |
| 气密性 | Leakage | <3mmHg/min (under 300 mmHg in a 100cc tank) | | | |
| 使用温度 | Operation Temperature | 0 ~50°C 30% to 85%RH | | | |
| 模式 | Type | Normally Opened | | | |
| 重量 | Weight | 10g | | | |

* Other parameters: according to customer demand for design/其他参数: 根据客户的需求设计.

77

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

H