

# PYF2-XG (二通水阀)

二通水阀  
TWO-WAY VALVE




## 典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products  
家用电器、医疗、美容、按摩、成人用品
- Beauty instruments, Water dispenser, small household appliances  
美容仪器、饮水机、小家电

## 外形尺寸

## Dimension

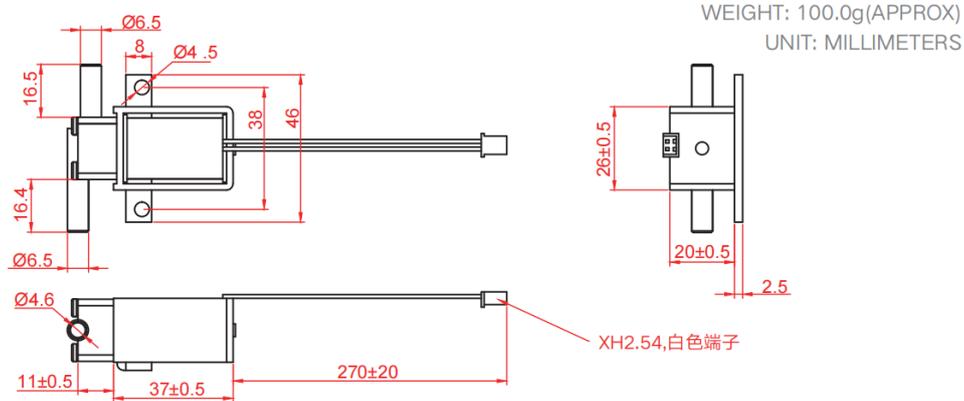

## 产品规格

## Product Specifications

额定电压	Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	300 ± 10%mA	240 ± 10%mA	240 ± 10%mA
直流阻抗	DC Resistance	20 ± 10%Ω	50 ± 10%Ω	100 ± 10%Ω
功率	Power	1.8 W	2.88 W	5.76 W
气嘴口径	Air Tap O.D.	Ø6.5mm		
最大压力	Maximum Pressure	100KPa(14.5Psi)		
媒介	Medium	Water		
排气速度	Exhaust Speed	1.0L/Min		
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)		
气密性	Leakage	<10 mmHg/min (under 300 mmHg in a 100cc tank)		
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH		
模式	Type	Normally Closed		
重量	Weight	100g		

\* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.