

PYF3-5LXB

(小型并联阀 (5联))

小型并联电磁阀

Small parallel solenoid valve




典型应用 Typical Applications

- ▶ Household appliances, medical, massage.
家用电器.医疗.按摩.
- ▶ massager, Rehabilitation Devices.
按摩器、康复器械.

外形尺寸

Dimension

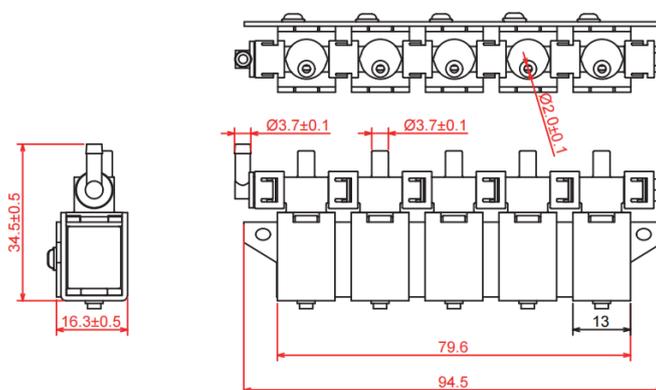

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3.7V	DC 5V	DC 6V	DC 12V	DC 24V
额定电流	Rated Current	247±10%mA	178±10%mA	200±10%mA	104±10%mA	92±10%mA
直流阻抗	DC Resistance	15±10%Ω	28±10%Ω	30±10%Ω	115±10%Ω	260±10%Ω
功率	Power	0.92W	0.89W	1.2W	1.25W	2.2W
气嘴口径	Air Tap O.D.	Ø3.7mm				
最大压力	Maximum Pressure	350mmHg				
媒介	Medium	空气				
排气速度	Exhaust Speed	<6.0s (from 300mmHg to 15mmHg @500cc tank)				
寿命测试	Life Test	≥15万次 times (ON2秒, OFF3秒)				
气密性	Leak age	<15mmHg/min(under 300mmHg in a500cc tank)				
使用温度	Operation Temperature	0-50°C 65%RH				

*Other parameters: according to customer demand for design/其他参数:根据客户的需求设计,

99

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

H