

PYF3-XM (二通小水阀)

二通电磁阀
WATER VALVE




典型应用 Typical Applications

- ▶ Home appliances, medical, beauty, massage, adult products
家用电器、医疗、美容、按摩、成人用品
- ▶ Beauty instruments, adult products, small household appliances
美容仪器、成人用品、小家电

外形尺寸

Dimension

WEIGHT: 32.0g(APPROX)
UNIT: MILLIMETERS

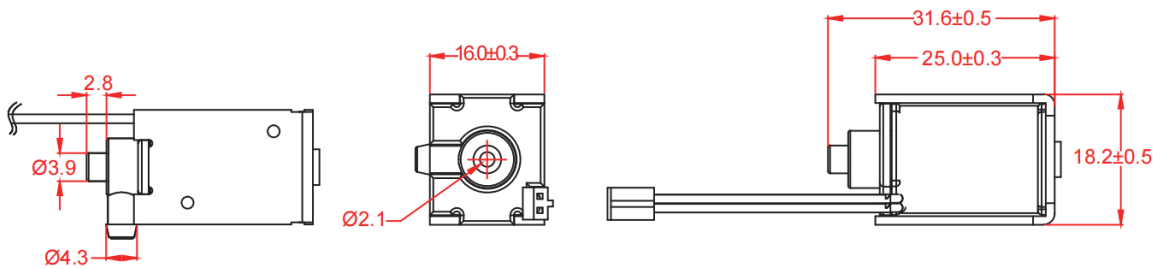

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 5V	DC 6V	DC 12.0V
额定电流	Rated Current	500 ± 10%mA	410 ± 10%mA	330 ± 10%mA	300 ± 10%mA	200 ± 10%mA
直流阻抗	DC Resistance	6 ± 10%Ω	9 ± 10%Ω	15 ± 10%Ω	20 ± 10%Ω	60 ± 10%Ω
功率	Power	1.5 W	1.52 W	1.65 W	1.8 W	2.4 W
气嘴口径	Air Tap O.D.	Ø3.9mm				
最大压力	Maximum Pressure	100KPa(14.5Psi)				
媒介	Medium	Water				
排气速度	Exhaust Speed	200mL/Min				
寿命测试	Life Test	≥ 200,000 Times (ON 5秒, OFF 5秒)				
气密性	Leakage	<10 mmHg/min (under 300 mmHg in a 100cc tank)				
使用温度	Operation Temperature	0 ~50°C 30% to 85%RH				
模式	Type	Normally Closed				
重量	Weight	32g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.